


Bifilar Helical Antenna

ASC Signal Corporation's Bifilar Helical Antenna is widely used for satellite communications. This antenna is engineered to assemble rapidly and is rugged enough to survive in winds up to 115 mph without ice and 95 mph with 1/2 inch of ice.

This antenna is available in left hand or right hand circular polarizations with different mounting arrangements.

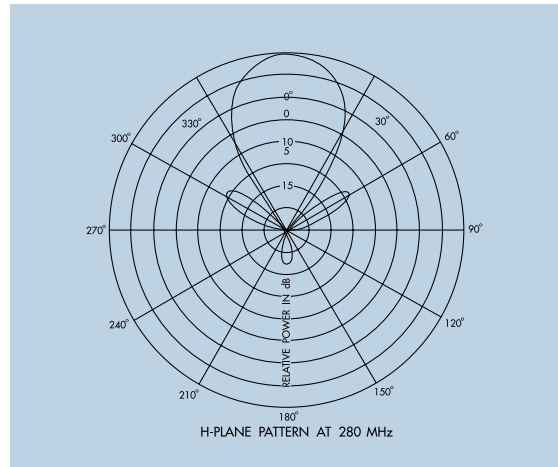

SPECIFICATIONS

Frequency Range 245-315 MHz	Azimuth Adjustment 360°	Size Assembled Antenna Length 122 in (3100 mm)	
Gain, Nominal at 280 MHz	.. 12.5 dBic	Elevation Adjustment 90°	Group Plane Diameter 39 in (990 mm)	
VSWR 1.5 Maximum	Wind Survival, No Ice 115 mph	Part Number (R.H. Circular Polarization) 63305A-5	
Beamwidth E-Plane	... 34°	Weight	Antenna 34 lb (15.5 kg)	Part Number (L.H. Circular Polarization) 63305A-6
H-Plane	... 43°	Counterweight 43 lb (19.5 kg)	NATO Stock Number 5985-01-136-0180	
Axial Ratio, Nominal > 2 dB	Tilt Mount 10 lb (4.5 kg)			
Input Connector Type N (Female)	Tripod Assembly	.. 29 lb (13.2 kg)			